

SAIL SHWR PK

SAIL Shower Range Complete Sail Recessed Dual Control




Specification

Style:	Contemporary
Finish/Colour:	Chrome Plated
Main Construction Material:	Brass; ABS
No of Controls:	2
Shower Type:	Dual Control
Shower Head Type:	Fixed Head
Valve/Cartridge Type:	3/4" Ceramic Disc Valve 1/4 turn
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing systems
Working Pressure Range:	Min: 0.2 bar, Max: 5 bar
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Features:

- Our stunning Sail shower valve with a slimline 200mm fixed head
- Adjustable max temp
- Includes SAI SHCVO C
- Includes FH SLRD01 C

Product Certifications:

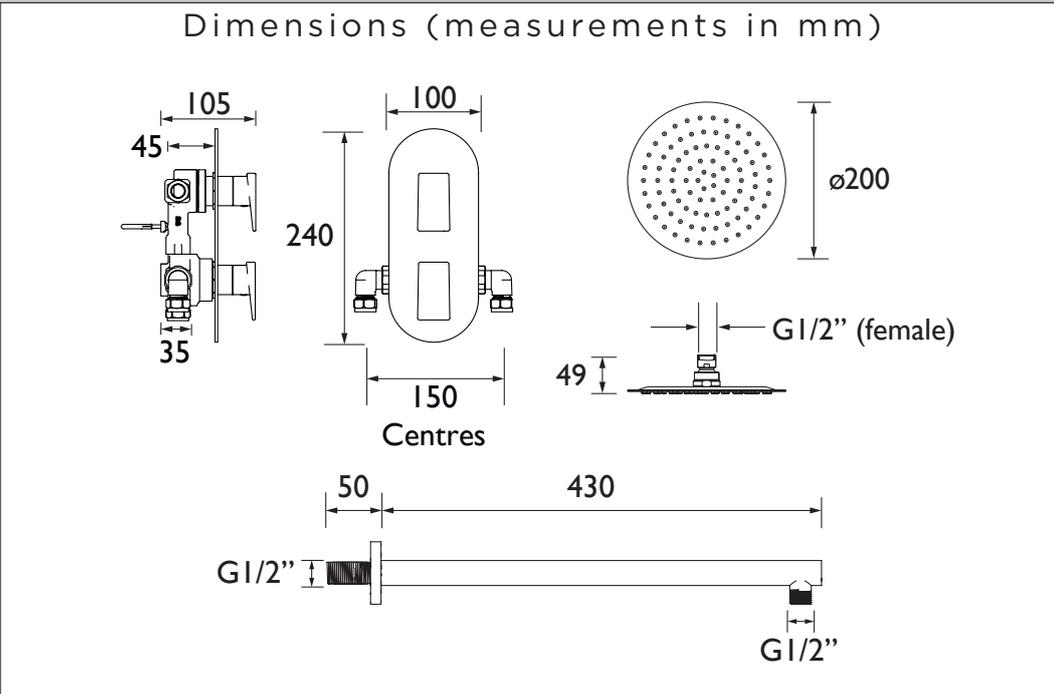

For more products, visit our website:
<http://www.bristan.com>



Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	9.39	14.85	21	29.7	36.37	46.96

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D2