


# N2 SHCDIV C

## 1901 Shower Range 1901 Recessed Thermostatic Dual Control Shower Valve with Integral Two Outlet Diverter Chrome

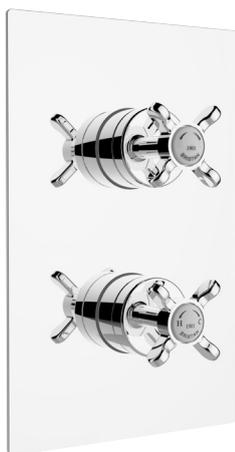

### Features:

- 15mm inlet connections
- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 45mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 65°C

### Product Certifications:



WRAS Cert. Number: 2005901  
WRAS Expiry Date: 31/05/2025




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Dual Control
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All, preferably balanced
Minimum Dynamic Pressure:	0.2 bar
Connection Inlet:	15mm Compression Connections
Isolation Valve Included:	No
Check Valve Included:	Yes

### Dimensions (measurements in mm)

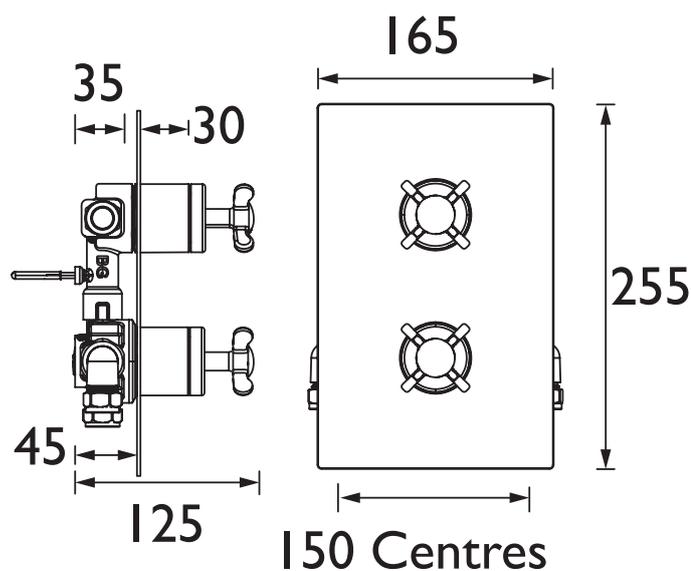

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	5	9.2	13.6	19.7	24.3	31.5
Outlet 1 (Flow Limiters)	3.9	7	9.4	11.1	11.2	12.2
Outlet 2	5	9.2	13.6	19.7	24.3	31.5
Outlet 2 (Flow Limiters)	3.9	7	9.4	11.1	11.2	12.2

## TECHNICAL DATA SHEET



# BRISTAN

D6