

TS1503ECP-2000-MK COMMERCIAL Shower Range

15mm Thermostatic Exposed
Mixing Valve



Specification

| | |
|--------------------------------------|--------------------------|
| Finish/Colour: | Chrome |
| Main Construction Material: | Brass |
| No of Controls: | 1 |
| Shower Type: | Exposed Shower |
| Shower Head Type: | N/A |
| Valve/Cartridge Type: | Thermostatic |
| Maximum Hot Water Supply Temperature | 80 |
| Maximum Static Pressure: (bar) | 8 |
| Plumbing System Suitability: | All, Preferably Balanced |
| Working Pressure Range: bar | 0.2-5 |
| Connection Inlet: | 15mm Compression Elbows |
| Connection Outlet: | 1/2" BSP |
| Isolation Valve Included: | No |
| Check Valve Included: | Yes |

Features:

- Ideal for either single point or limited group applications
- Single adjustable temperature control for user comfort
- Automatic shut-off in the event of hot or cold water supply failure
- Check valves and serviceable filters as standard
- Operates at a maximum pressure differential of 10:1
- Requires separate flow control

Product Certifications:



Expiry Date : 30/12/2023
Cert Number : 1812703




Cert Number : NSF2014/0718
Expiry Date : 06/07/2023



For more products, visit our website:
<http://www.bristan.com>



Dimensions (measurements in mm)

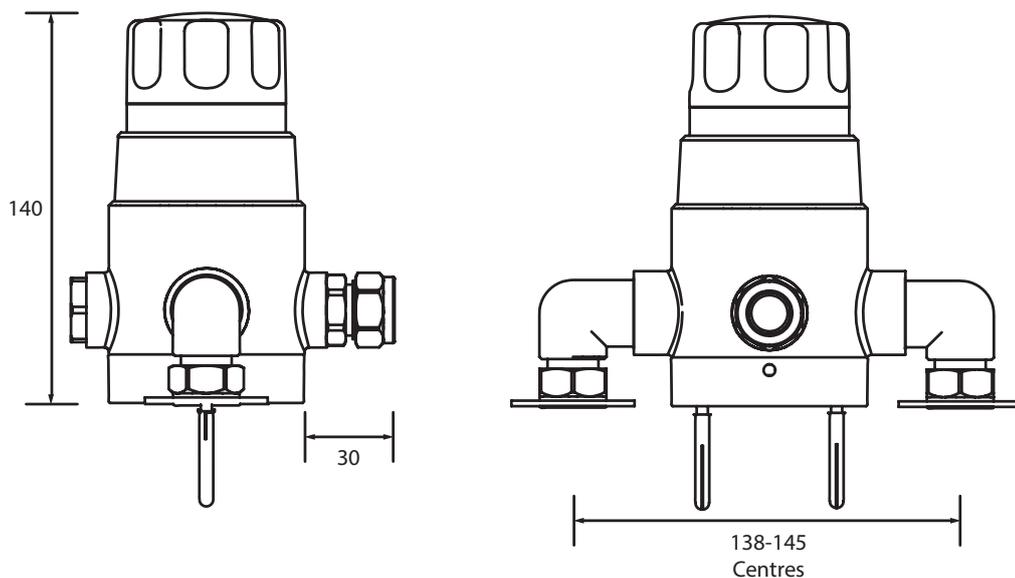

Flow Rates (l/min)

| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 |
|-----------------------|-----|-----|-----|-----|-----|---|
| Flow Limiter Fitted | 4.6 | 6.8 | 7.1 | 8.1 | 8.6 | 9 |

TECHNICAL
DATA
SHEET



BRISTAN

D7