AQUALISA


COOL TOUCH SQUARE SHOWER COLUMN





ΗP


CHROME


DIMENSIONAL DRAWINGS

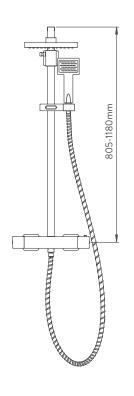









AQUALISA COOL TOUCH SQUARE SHOWER COLUMN



Н	Р		
C	Н	ROM	E

.....

TECHNICAL SPECIFICATIONS

Minimum pressure requirements	1 Bar
This pressure requirements	. 50
Maximum pressure requirements	5 Bar
Inlet fitting connections	3/4" Threaded
Rear inlet supply positions	150mm centres
Outlet connections	1/2" Thread
Valve inlet centres	150mm centres
Supply temperature	Max 65°C
Water system	High Pressure
	Separate temperature control with override button for extra safety
	Brass "Cool Touch" body
	Flow control with integral diverter to switch between shower heads
	Includes Easy fit wall brackets
Features	Soft rub nozzles for easy cleaning
	1 + 1 spray patterns
	Adjustable telescopic shower column 805mm - 1180mm
	200mm fixed drencher head, 89mm adjustable head
	1.5m chrome plated stainless steel hose (11mm bore)
Colour	Chrome
Guarantee period	5 years