


AQUALISA

ASPIRE DL EXPOSED MIXER SHOWER

ASP001EA

WITH ADJUSTABLE HEAD

DIMENSIONAL DRAWINGS

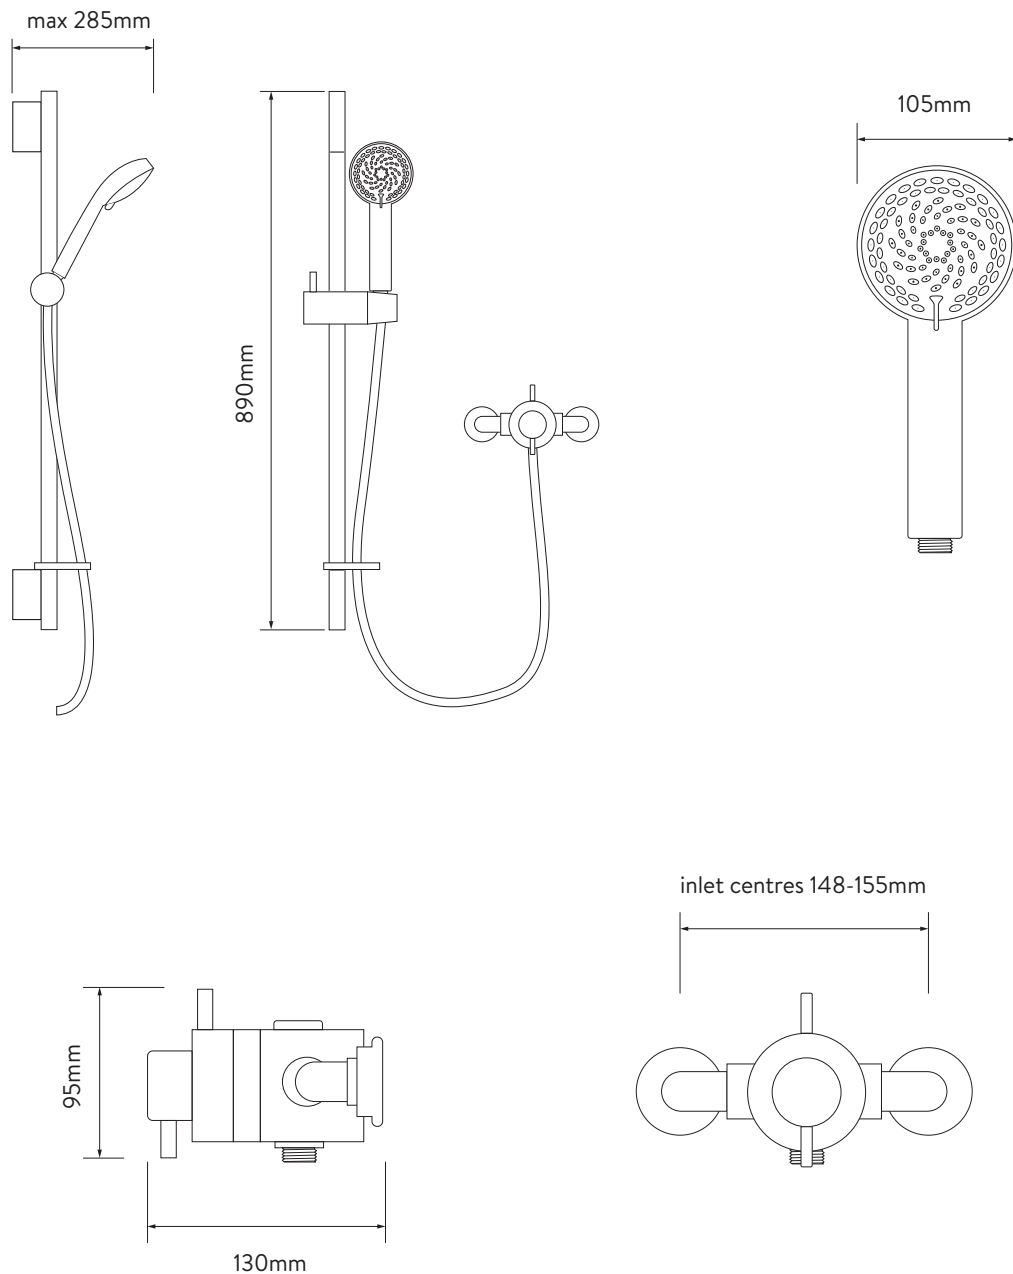

AQUALISA

ASPIRE DL EXPOSED MIXER SHOWER

ASP001EA

WITH ADJUSTABLE HEAD

TECHNICAL SPECIFICATIONS

Minimum pressure requirements	0.1 bar
Maximum pressure requirements	10 bar (Static)
Inlet fitting connections	15mm compression
Inlet supply positions	Hot/left, cold/right
Outlet connections	½" BSP
Valve inlet centres	148-155mm
Supply temperature	5 - 20°C Cold Supply 55 - 65°C Hot Supply
Water system	Gravity, Boosted Gravity, Combi and Balanced High Pressure
Features	All-metal valve
	Dual lever controls for water flow and temperature
	105mm Harmony shower head
	Eco-spray setting can deliver water savings of up to 25% without compromising the showering experience
	4 spray patterns including an eco-spray setting
Colour	Chrome
Guarantee period	Valve – 5 year guarantee
	Head and Kit – 2 year guarantee