



### Features:

- Optimised for UK market, designed to work at pressure range of 0.1 - 5.0bar
- Thermostatic temperature control and automatic stop prevent surges of hot or cold water
- Performance Flow to provide a drenching experience
- Adjustable inlet centres, allowing you to use existing pipework with centres measuring anything between 136mm and 158mm.
- 5 Years Guarantee for your peace of mind

### Product Certifications:




### Additional Information:

- Matching taps are available for the Dawlish range, search Taps on our website to see the complete collection.

### Specification

Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Exposed Shower Valve
Valve/Cartridge Type:	Thermostatic Cartridge
Maximum Hot Water Supply Temperature °C:	65
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing conditions
Working Pressure Range:	Min. 0.1 Bar, Max. 5.0 Bar
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2" BSP
Isolation Valve Included:	No
Check Valve Included:	Yes

### Dimensions (measurements in mm)

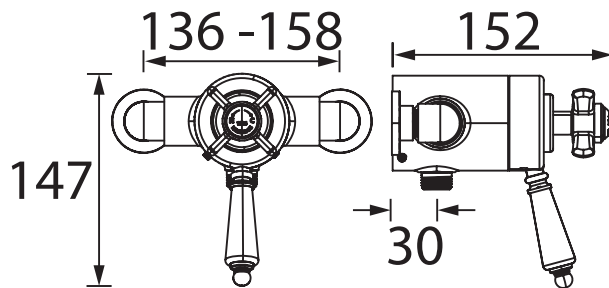

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	6.75	13	15.1	14.7	14.7	14.7
With Flow Regulators (Mixed)	3.28	5.19	7.33	10.37	12.7	16.4
Without Flow Regulators (Mixed)	12.16	19.23	27.2	38.47	47.11	60.82