SDCDUAL10

DAWLISH Shower Range

Dawlish Exposed Thermostatic Dual Control Shower Valve with Premium Flexible Riser Kit Vintage Gold



Specification				
Main Construction Material:	Brass			
No of Controls:	2			
Shower Type:	Exposed			
Valve/Cartridge Type:	Thermostatic			
Maximum Hot Water Supply Temperature °C:	65			
Maximum Static Pressure: (bar)	10			
Plumbing System Suitability:	Suitable for all plumbing conditions			
Working Pressure Range:	Min: 0.2 Max: 5.0			
Connection Inlet:	1/2"			
Connection Outlet:	1/2"			
Isolation Valve Included:	No			
Check Valve Included:	Yes			


Features:

- Optimised for UK market, designed to work at pressure range of 0.2 - 5.0bar
- Performance Flow to provide a drenching experience
- Adjustable inlet centres, allowing you to use existing pipework with centres measuring anything between 136mm and 158mm.
- · Premium handset
- Exposed

Product Certifications:



Dimensions (measurements in mm)

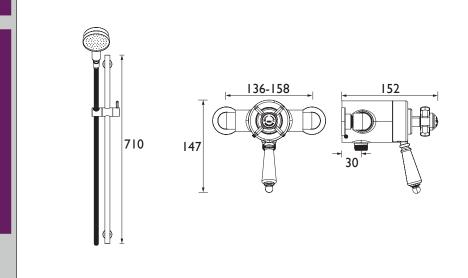

Additional Information:

- Available in Chrome or Vintage Gold
- Matching taps are available for the Dawlish range, search Taps on our website to see the complete collection.

Flow Rates (I/min)							
System Pressure (bar)	0.2	0.5	ı	2	3	5	
Through Handset with Flow regulators (mixed)	-	5.6	7.4	7.6	7.7	8.5	
Through Handset with no Flow regulators (mixed)	5.0	9.0	13.5	19.8	25.1	-	

TECHNICAL DATA SHEET YEAR



