


RENAISSANCE Shower Range

RENAISSANCE 2 SHWR PK

Renaissance 2 Recessed
Dual Control Shower Pack

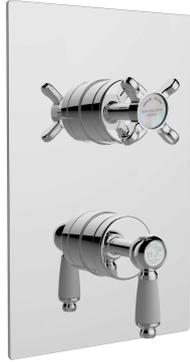

Features:

- Integral two outlet diverter
- Supplied with 200mm fixed head and a shower kit with single mode handset
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Fully serviceable from the front

Product Certifications:


For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Dual Control
Shower Head Type:	Both
Valve/Cartridge Type:	Recessed
Maximum Hot Water Supply Temperature	80
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All, preferably balanced
Working Pressure Range:	Min 0.2 bar, Max 5.0 bar
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

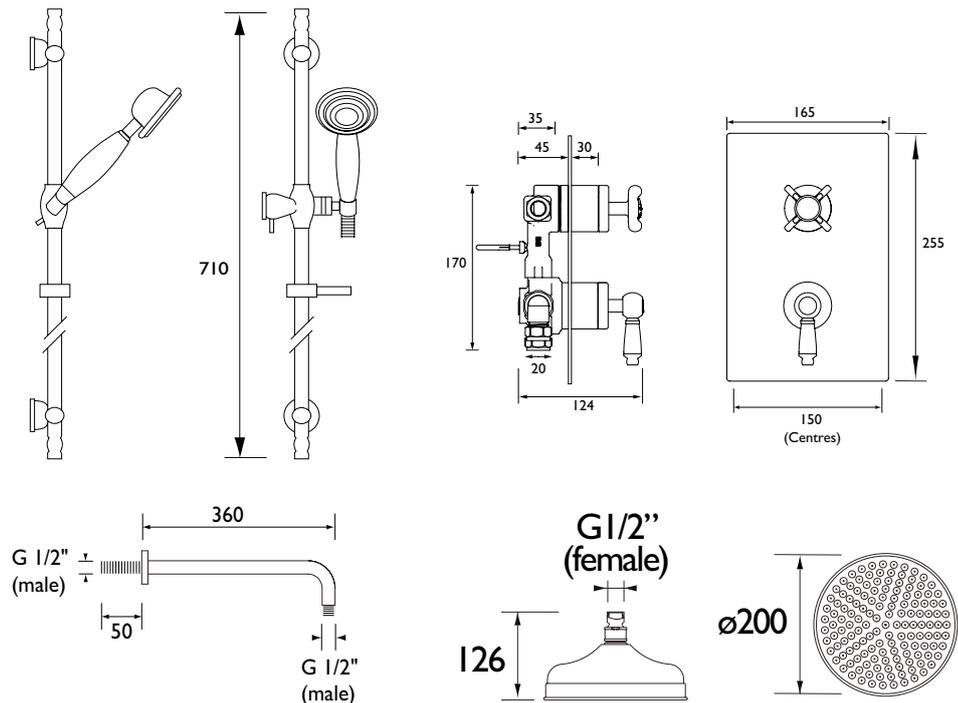

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	8.5	13.4	19	26.9	32.9	42.5

TECHNICAL
DATA
SHEET



BRISTAN

D2