CLR WMBF C

CLARET Tap Range Claret Wall Mounted Bath Filler Chrome



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Wall			
Handle Type:	Triangular			
Connection Inlet:	15mm Compression			
Connection Outlet:	M24 Coin Slot Aerator			
Number of Tap Holes:	2			
Valve/Cartridge Type:	45mm Single Lever Cartridge			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

Features:


- Long life ceramic cartridge for added durability and ease of use
- Easy to use metal handle
- Minimum working pressure of 0.3 bar

Product Certifications:



WRAS Certificate No: 1706003 WRAS Expiry Date: 30/06/2022

Dimensions (measurements in mm)

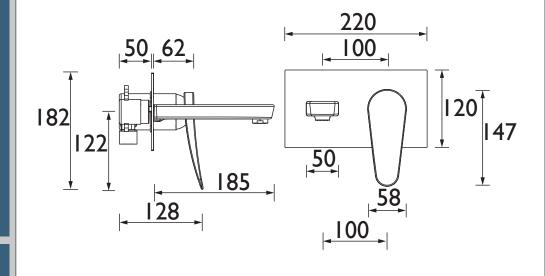

For more products, visit our website: http://www.bristan.com



Flow Rates (I/min)								
System Pressure (bar)	0.3	0.5	1	2	3	5		
CLR WMBF C (mixed)	13.9	18	26.2	31.4	35	45.2		

TECHNICAL DATA SHEET



